



INVERTER

1200VA

2400VA



FEATURES

- ECO friendly.
- Super-efficient.
- Full auto restart function.
- Wide Input voltage range.
- Critical overload protection.
- OFF mode charging design.

- Non-polluting (Green Device).
- Compact, sleek and light weight
- Advanced technology, optimizes battery life.
- DC to AC conversion, minimizing charging losses.


SPECIFICATIONS

MODEL	SKY 1200	SKY 2400
Capacity (VA/Watts)	1.2KVA/720W	2.4KVA/1440W
INPUT		
Nominal Voltage	230VAC	
Voltage Range	Narrow mode: 170VAC-280VAC Wide mode: 90VAC-280VAC	
OUTPUT		
Voltage Regulation	Battery mode: 230VAC +/-10%	
Waveform	Simulated sinewave	
BATTERY		
Battery Voltage	12 VDC 24 VDC	
Backup Mode	50Hz±1Hz	
Charge Current	10A	20A
Charging Voltage	13.72VDC (13.4VDC-13.9VDC)	27.44VDC (26.8VDC-27.8VDC)
SYSTEM FEATURES		
Transfer Time	20ms	
Communication Interface	SNMP (Optional)	
ENVIRONMENTAL		
Humidity	0-90% Relative Humidity 0-40 °C (Non-condensing)	
PHYSICAL		
Dimension W x D x H (mm)	330 x 227.8 x 92.5	
Net Weight (kgs)	2.6	2.8

INVERTER

1200VA

2400VA

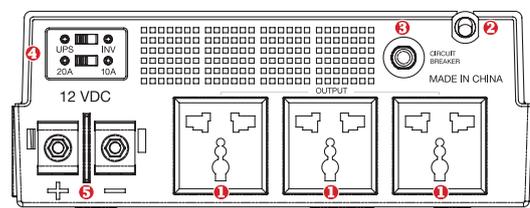

REAR PANEL

1. Universal Output Socket
2. AC Input
3. Circuit Breaker
4. Operation Mode
5. External Battery Connector